


AIBOCN
The wisdom of Life

Smart Lock

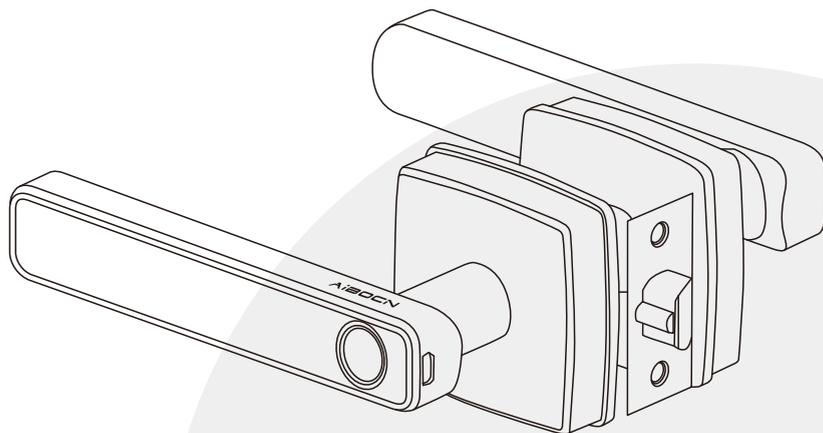

APP Guide


MODEL: N1TY

CONTENTS

System Initialization	1
Download the tuya APP	1
Sign-up and Login Your Account	2
Pair the lock with APP	2
Lock Page Overview	3
APP Unlock	4
Member Management	4
1. Add member	4
2. Administrator Manage Family Member	5
3. Administrator manage other member	7
Add Fingerprint	12
Add Password	12
Unlocking Records	20
Sound Volume Settings	20
Passage Mode	21
Low Battery Warning	22
Smart Linkage	23
Restore Factory Settings	24
FCC Statement	26
Warranty	26

System Initialization

1. Remove the battery cover on indoor lock body, keep pressing the reset button for about 5 seconds, keyboard lights up and long “Beep” once, reset successfully.
2. Complete the initialization, and start to pair the lock with tuya APP.

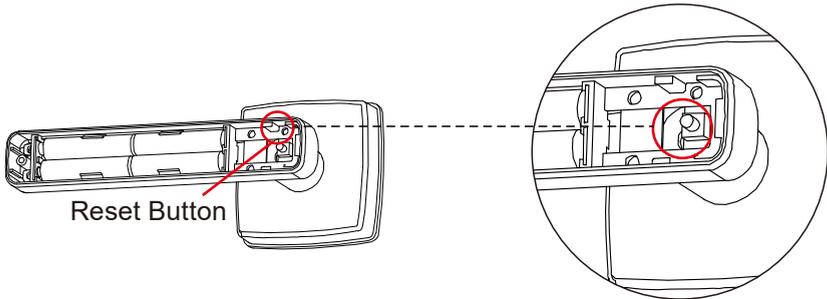

Download the tuya APP

1. Download the “Tuya Smart” App from Google play store (Android 4.3 version) or Apple store(IOS7.0 version)and above.




Sign-up and Login Your Account

1. Install and register an account with your phone number or email.




Pair the lock with APP





STEP 3
Tap on Add



STEP 4
Tap on Done

Note: You may need to tap on lock keypad.

Lock Page Overview



Member Management

Manage family members and other members



Records Page

View entry times, attempts and methods



Smart Linkage

Notification of family members returning home and door lock alarm



Settings

Set fingerprint, permanent and temporary passwords



Remote Unlock

Unlock remotely if tuya Gateway is connected nearby



Automatic Lock Switch

Auto lock on or off



Lock Navigation Volume

Adjust the lock volumez

Note: Some functions are not available if the tuya Gateway is not connected to the lock.

APP Unlock



 To unlock the lock, tap this icon once.


Note: This will only work while you are within bluetooth range of the lock.
If you need remote unlocking, please purchase a Tuya gateway.

Member Management


1. Add member



STEP 1
Tap on Member Management.



STEP 2
Select the members you want to add.

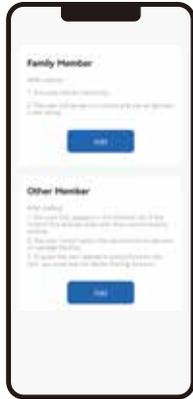

STEP 3

Fill in the relevant information of the member.

Note: Whether it is a family member or other member, they need to register a Tuya.

2. Administrator Manage Family Member

2.1. Permission Settings


Administrator can turn on or off the management permissions of passwords, fingerprints, unlock with mobile phones, and dynamic password for family members.




STEP 1
Tap on Member Management.





STEP 2
Select the family member you want to set up.



STEP 3
Tap on Edit.

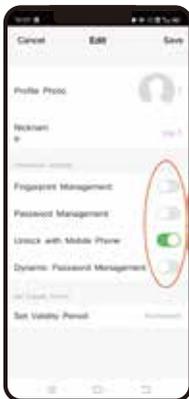

STEP 4
Set permissions.

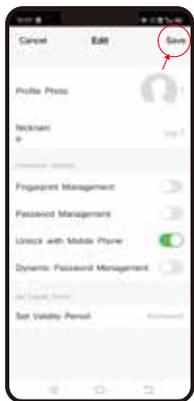

STEP 5
Tap on Save.

Note: via bluetooth, keep your phone close to the lock, if there is a Tuya gateway, it can be set remotely.


3. Administrator manage other member

3.1. Share the Lock on the APP



Only when the administrator shares the door lock on the APP with other members and enables the permission, other members can use the APP to unlock.



STEP 1
Tap on Member Management.



STEP 2
Select the other member you want to set up.

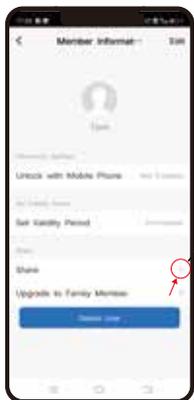





STEP 3
Tap on Share.




STEP 4
Other members need to download and register a Tuya account, then enter the Tuya account of other member.

3.2. Permission Settings


Administrator can turn on or off the permission of unlock with mobile phones for other member.

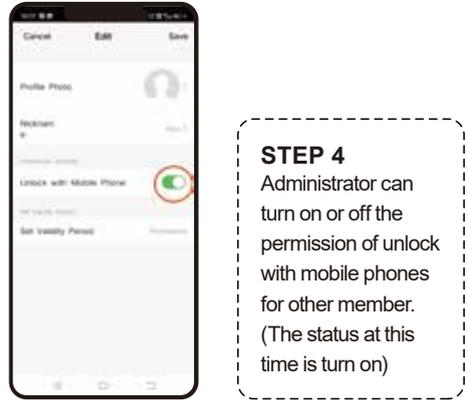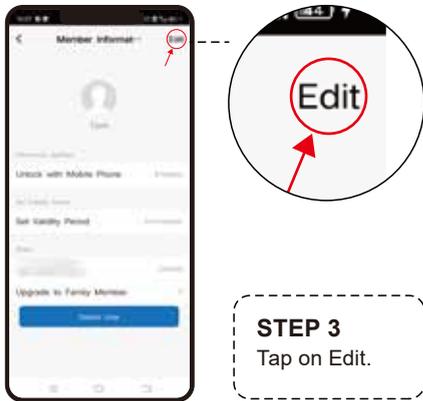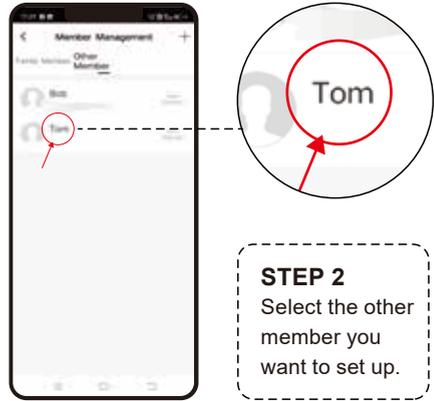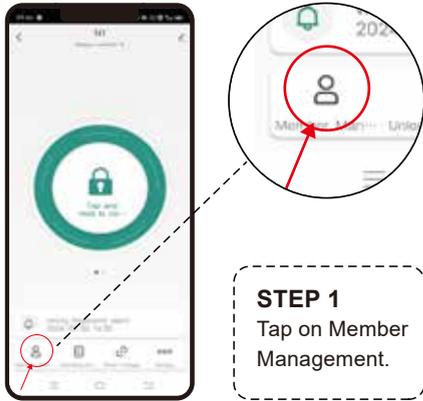

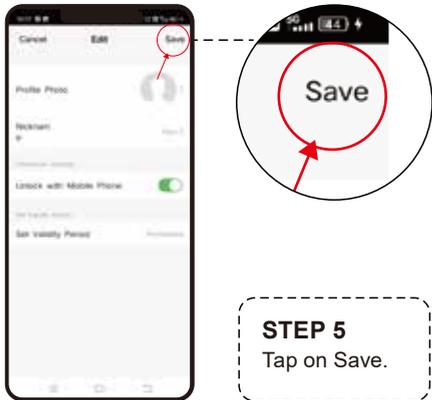

Note: via bluetooth, keep your phone close to the lock, if there is a Tuya gateway, it can be set remotely

3.3. Set Validity Period

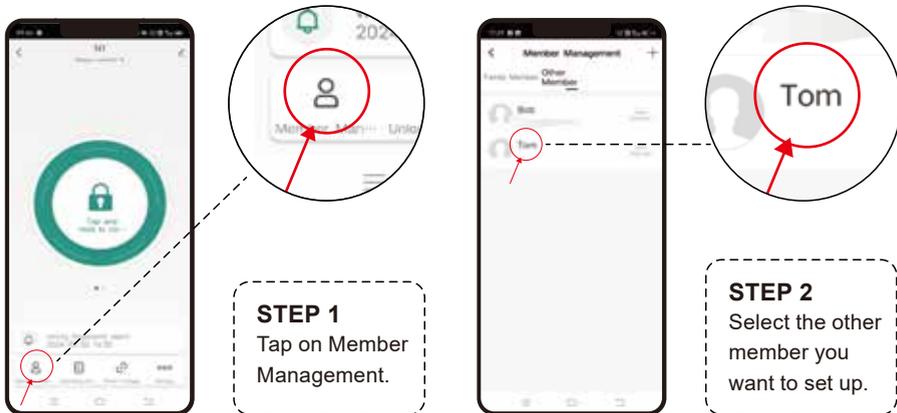



STEP 3
Tap on Edit.



STEP 4
Administrators can set a time limit (permanent or timed) for other members to unlock using the mobile APP.




STEP 5
Tap on Save.

3.4. Upgrade to Family Member

You can upgrade other member to family member.




STEP 1
Tap on Member Management.



STEP 2
Select the other member you want to set up.



STEP 3
You can upgrade other member to family member.




STEP 4
Tom becomes a family member from other member.

Note: This lock can only be connected to one mobile phone via Bluetooth at a time. When pairing the lock with Bluetooth, please make sure that the lock is not connected to other mobile phones.

Add Fingerprint


1. Method 1




STEP 1
Tap on Settings.



STEP 2
Tap on
Fingerprint
Management.



STEP 3
Add Fingerprint.

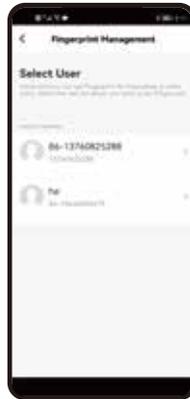

STEP 4
Select User.



STEP 5
Tap on Start
Capturing.



STEP 6
Follow instructions
on app. You will be
asked to place your
finger on the sensor
5 times.




STEP 7
Name it & Click
Done.


Experiencing issues with fingerprint recognition?

- Ensure the sensor surface is clean.
- Try a different finger.
- Ensure your finger is moist enough.
- Take out batteries for a minute and place back in.


2. Method 2




STEP 1
Tap on Member Management.




STEP 2
Select the member you need to add a Fingerprint for.



STEP 3
Select Fingerprint.




STEP 4
Add Fingerprint.



STEP 5
Tap on Start Capturing.

Add Password

1. Method 1




STEP 1
Tap on Settings.




STEP 2
Tap on Password Management.



STEP 3
Tap on Add Password.

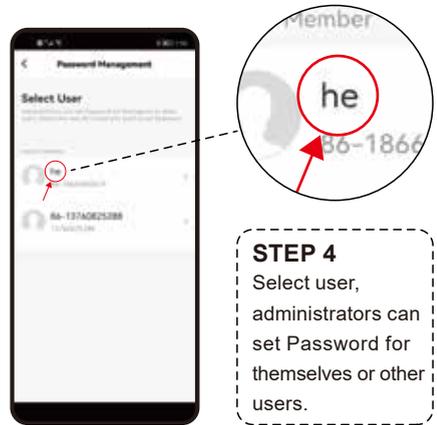

STEP 4
Select user, administrators can set Password for themselves or other users.

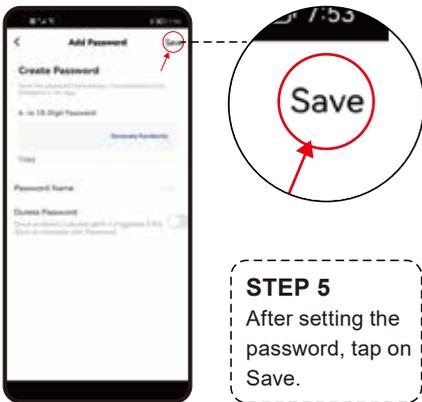


STEP 5
After setting the password, tap on Save.

Note: 1. This will only work while you are within bluetooth range of the lock. If you need remote unlocking, please purchase a Tuya gateway.
2. When you unlock with password, please press # after entering the password.


2. Method 2



STEP 1
Tap on Member Management.



STEP 2
Select the member you need to add a password for.



STEP 3
Tap on password.




STEP 4
Tap on Add Password.





STEP 5
After setting the password, tap on Save.

Here are 6 different temporary passwords.

<p>Online Password</p> <p>We recommend that you use the password when the Bluetooth connection is stable.</p>	Dynamic Password	The dynamic password expires after 5 minutes.
	One-Time Password	The password can be used only once before it expires.
	Periodic Password	The password can be used multiple times before it expires.
<p>Offline Password</p> <p>We recommend that you use the offline password in case there is or unstable Bluetooth connection.</p>	One-Time Password	The password can be used only once before it expires.
	Time-Limited Password	Use the time-limited password at least once within 24 hours after the password takes effect. Otherwise, the password becomes invalid.
	Clearing Code	The clearing code can be used to clear a password or all passwords. It can be used only once before it expires.



STEP 1
Tap on Settings

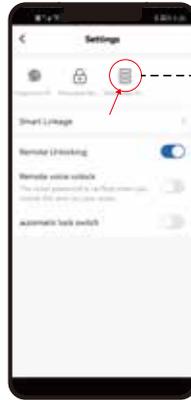


STEP 2
Tap on Temporary Password




STEP 3
Choose the type of password you want to set according to your needs

Unlocking Records




STEP 1
Tap on Unlocking
Records

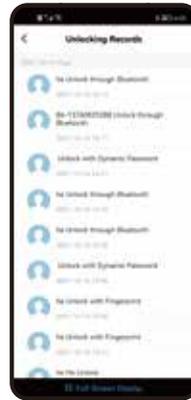



STEP 2
View Unlocking
Records

Sound Volume Settings

Choose the volume according to your needs.



STEP 1
Tap on Settings.

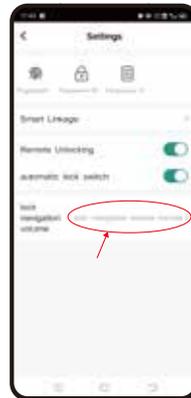


STEP 2
Tap on Lock
navigation volume.





STEP 3
Select the volume
you want to set.

Passage Mode

1. Turn on the Passage Mode




STEP 1
Tap on Settings.

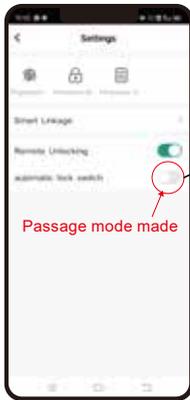

STEP 2
Turn off the
automatic
lock switch.

Note: Your phone should be nearby the lock when setting passage mode via APP.


2. Turn off the Passage Mode

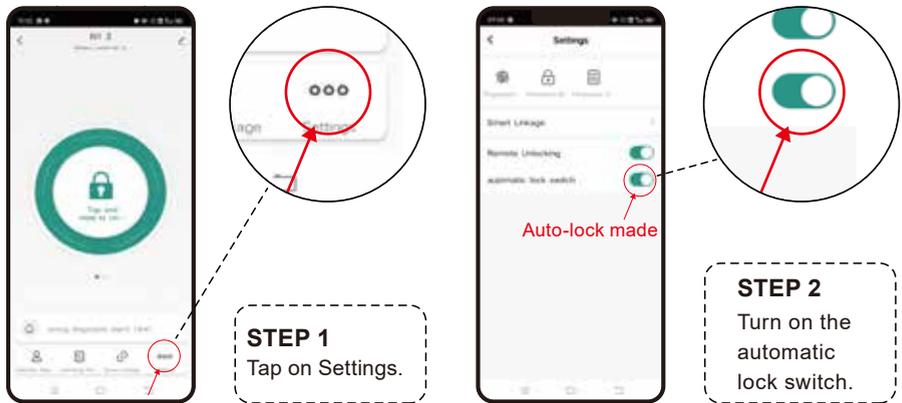

Low Battery Warning

If the battery voltage is lower than 3V, the lock will beep and the place where the fingerprint is unlocked will flash red for 3 seconds.

At the same time, you can check the power of the door lock at any time in the mobile APP.

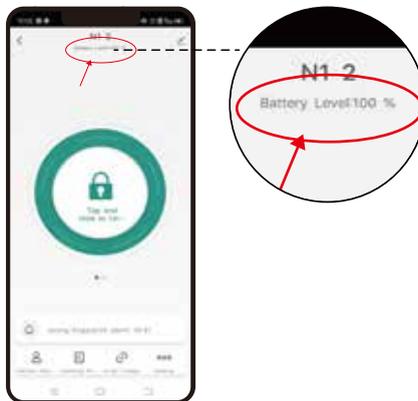


Note: via bluetooth, keep your phone close to the lock, if there is a Tuya gateway, you can view it remotely

Smart Linkage

1. Family Go Home


When you turn on the switch of family go home on Tuya APP, the family member(Family member that need to be added to the app) unlocks the door, and your mobile phone will have a message to notify you that a family member go home.

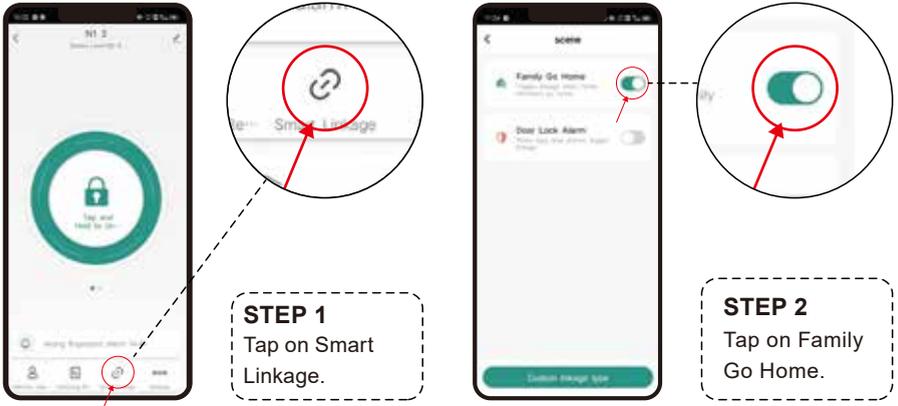

Note: via bluetooth, keep your phone close to the lock, if there is a Tuya gateway, you can view and set it remotely.)

2. Door Lock Alarm

When you turn on the switch of family go home on Tuya APP, the family member (Family member that need to be added to the app) unlocks the door, and your mobile phone will have a message to notify you that a family member go home.

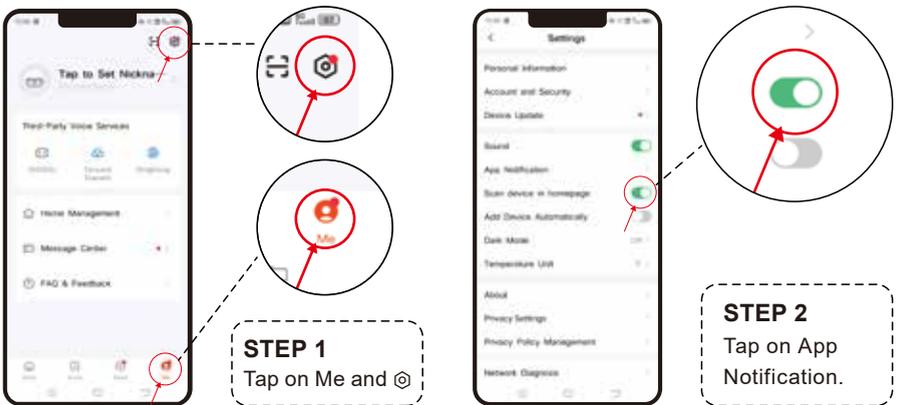




Note: Note: via bluetooth, keep your phone close to the lock, if there is a Tuya gateway, you can view and set it remotely.

Restore Factory Settings



There are two methods to reset the lock.

Method 1: Reset on the lock

Remove the battery cover on inside body - Keep pressing the reset button for 5 seconds - keyboard lights up and the system prompts long "Beep" once - Reset successfully


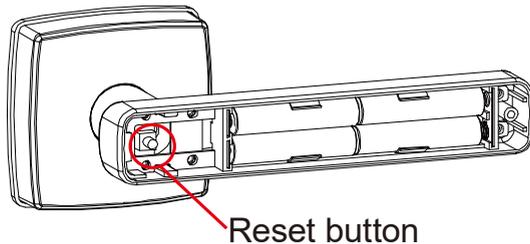


Method 2: Remove the lock on App to reset

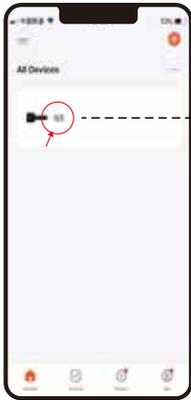


STEP 1

Find the lock on home page of App, then long press the lock's name for 1 seconds.

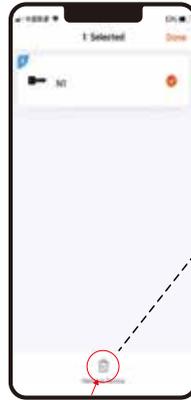

STEP 2

Click "Remove Device" at the bottom of the interface.



STEP 3

Click "Confirm" in the pop-up window. Reset successfully.

FCC Statement

1. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
2. Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.
3. Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

Warranty

1. We provide 30 days worry-free money back and one year limited warranty.
2. Any problem, please feel free to contact us.

E-mail us at: service@aibocn.net